




IN-LINE REPLACEABLE ELECTRODE ASSEMBLIES

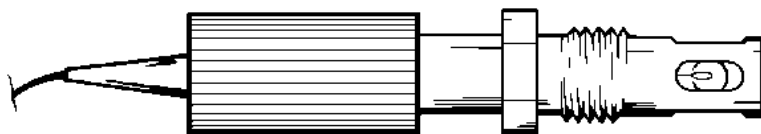

1061013

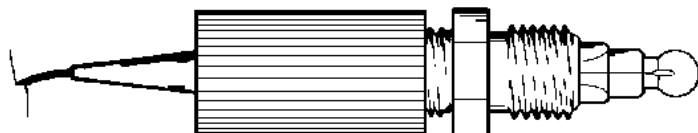

1061012

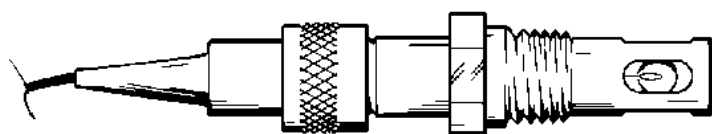

1051013

These electrode assemblies are designed for easy maintenance and electrode replacement.


Electrode replacement requires no tools and can be accomplished in a matter of minutes.

The electrode housing features a 1/2" MNPT thread and is available in a choice of corrosion resistant Kynar® or 316 Stainless Steel.

The electrode housing is available with or without a guard protecting the pH membrane. Probe insertion is 1" from the thread by 1/2" diameter. It will withstand pressure up to 150 psi.

A wide selection of pH or ORP electrodes are available to cover all applications.

These electrode assemblies are used where electrode replacement is frequent. They will reduce overall replacement and maintenance costs.



Part Number	Material	Guard	Maximum Temperature	Maximum Pressure
1061012	Kynar®	No	100°C	150 psi (1000kPa)
1061013	Kynar®	Yes	100°C	150 psi (1000kPa)
1051013	Stainless Steel	Yes	120°C	150 psi (1000kPa)

Not available with temperature compensation.



pHoenix Electrode Sales CC ! P.O. Box 5487 ! Cresta ! 2118
Tel. (011) 792 1210 ! Fax. (011) 793 6863 ! e-mail. sales@ph.co.za